


LV Guide Wheels

d 7-20mm



- Available with bearings steel and stainless steel
- Available with shields and NBR seals

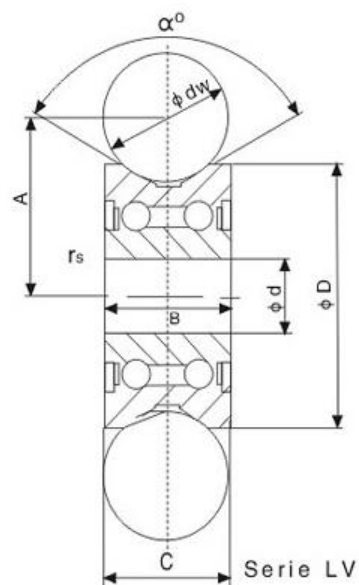

Designation	Mass ≈(g)	Principle Dimensions (mm)								Load Rating	
		dw	d	D	B	C	A	α	rs	Cw (KN)	Cow(KN)
LV 20/7	17	10	7	22	11	11	14.5	120	0.3	3.78	2.05
LV 20/8	49	10	8	30	14	14	18.1	120	0.3	5.13	2.67
LV 201	130	20	12	41	20	20	28	120	0.3	8.47	5.37
LV 201-14	107	14	12	39.9	20.1	18	24	100	0.5	8.9	5
LV 202-38	87	10	15	38	17	17	22.25	120	0.5	8.47	5.37
LV 202-40	110	10	15	40	18	18	22	120	0.5	8.47	5.37
LV 202-41	116	20	15	41	20	20	28	120	0.5	8.47	5.37
LV 203	325	20	17	58	25	25	35	120	0.5	14.66	9.1
LV 204-57	290	30	20	57	22	22	41	120	0.6	14.66	9.1
LV 204-58	310	30	20	58	25	25	41	120	0.6	14.66	9.1